

KNOTS, SPLICES and ROPE WORK

A PRACTICAL TREATISE

Giving Complete and Simple Directions for Making All the Most Useful and Ornamental Knots in Common Use, with Chapters on Splicing, Pointing, Seizing, Serving, etc. Adapted for the use of Travellers, Campers, Yachtsmen, Boy Scouts, and all others having to use or handle ropes for any purpose.

By

A. HYATT VERRILL

Editor Popular Science Dept., "American Boy Magazine."



SECOND REVISED EDITION

Illustrated with 156 Original Cuts Showing How Each Knot, Tie or Splice is Formed and Its Appearance When Complete.

KNOTS, SPLICES and ROPE WORK

A PRACTICAL TREATISE

Giving Complete and Simple Directions for Making All the Most Useful and Ornamental Knots in Common Use, with Chapters on Splicing, Pointing, Seizing, Serving, etc. Adapted for the Use of Travellers, Campers, Yachtsmen, Boy Scouts, and All Others Having to Use or Handle Ropes for Any Purpose.

By

A. HYATT VERRILL

Editor Popular Science Dept., "American Boy Magazine."

SECOND REVISED EDITION

Illustrated with 156 Original Cuts Showing How Each Knot, Tie or Splice is Formed and Its Appearance When Complete.

CONTENTS

INTRODUCTION

CHAPTER I

CORDAGE

Kinds of Rope. Construction of Rope. Strength of Ropes. Weight of Ropes. Material Used in Making Ropes.

CHAPTER II

SIMPLE KNOTS AND BENDS

Parts of Rope. Whipping and Seizing Rope. Loops. Cuckolds' Necks. Clinches. Overhand and Figure-eight Knots. Square and Reef Knots. Granny Knots. Open-hand and Fishermen's Knots. Ordinary Knots and Weavers' Knots. Garrick Bends and Hawser Hitches. Half-hitches.

CHAPTER III

TIES AND HITCHES

Larks' Heads. Slippery and Half-hitches. Clove Hitches. Gunners' Knots and Timber Hitches. Twists, Catspaws, and Blackwall Hitches. Chain Hitch. Rolling and Magnus Hitches. Studding-sail and Gaff-topsail Halyard Bends. Roband and Fisherman's Hitches.

CHAPTER IV

NOOSES, LOOPS, AND MOORING KNOTS

Waterman's Knot. Larks' Heads with Nooses. Cleat and Wharf Ties. Bow-line Knots. Loops and Loop Knots.

CHAPTER V

SHORTENINGS, GROMMETS, AND SELVAGEES

Two-, Three-, and Fivefold Shortenings. Single Plaits and Monkey Chain. Twist Braids and Braiding Leather. Open Chains. Seized and Bow Shortenings. Sheepshanks and Dogshanks. Grommets. Selvagee Straps and Selvagee Boards. Flemish and Artificial Eyes. Throat Seizings. Lashed Splices.

CHAPTER VI

LASHINGS, SEIZINGS, SPLICES, ETC.

Wedding Knots and Rose Lashings. Deadeye and Loop Lashings. Belaying-pin Splice. Necklace Ties. Close Bands and End Pointing. Ending Ropes. Short Splices. Long Splices. Eye and Cut Splices.

CHAPTER VII

FANCY KNOTS AND ROPE WORK

Single Crown Knots. Tucked Crowns. Single Wall Knots. Common and French Shroud Knots. Double Crown and Double Wall Knots. Crowning Wall Knots. Double Wall and Crown. Manrope Knots. Topsail-halyard Toggles. Matthew Walker and Stopper Knots. Turks' Heads and Turks' Caps. Worming, Parcelling, and Serving. Serving Mallet. Half-hitch Work. Four-strand and Crown Braids. Rope Buckles and Swivels. Slinging Casks and Barrels. Rope Belting.

INDEX

INTRODUCTION

The history of ropes and knots is so dim and ancient that really little is known of their origin. That earliest man used cordage of some kind and by his ingenuity succeeded in tying the material together, is indisputable, for the most ancient carvings and decorations of prehistoric man show the knot in several forms. Doubtless the trailing vines and plants first suggested ropes to human beings; and it is quite probable that these same vines, in their various twistings and twinings, gave man his first idea of knots.

Since the earliest times knots have been everywhere interwoven with human affairs; jugglers have used them in their tricks; they have become almost a part of many occupations and trades, while in song and story they have become the symbol of steadfastness and strength.

Few realize the importance that knots and cordage have played in the world's history, but if it had not been for these simple and every-day things, which as a rule are given far too little consideration, the human race could never have developed beyond savages. Indeed, I am not sure but it would be safe to state that the real difference between civilized and savage man consists largely in the knowledge of knots and rope work. No cloth could be woven, no net or seine knitted, no bow strung and no craft sailed on lake or sea without numerous knots and proper lines or ropes; and Columbus himself would have been far more handicapped without knots than without a compass.

History abounds with mention of knots, and in the eighth book of "Odyssey" Ulysses is represented as securing various articles of raiment by a rope fastened in a "knot closed with Circean art"; and as further proof of the prominence the ancients gave to knots the famous Gordian Knot may be mentioned. Probably no one will ever learn just how this fabulous knot was tied, and like many modern knots it was doubtless far easier for Alexander to cut it than to untie it.

The old sorcerers used knots in various ways, and the witches of Lapland sold sailors so-called "Wind Knots," which were untied by the sailors when they desired a particular wind. Even modern conjurors and wizards use knots extensively in their exhibitions and upon the accuracy and manner in which their knots are tied depends the success of their tricks.

In heraldry many knots have been used as symbols and badges and many old Coats of Arms bear intricate and handsome knots, or entwined ropes, emblazoned upon them.

As to the utility of knots and rope work there can be no question. A little knowledge of knots has saved many a life in storm and wreck, and if every one knew how to quickly and securely tie a knot there would be far fewer casualties in hotel and similar fires. In a thousand ways and times a knowledge of rope and knots is useful and many times necessary. Many an accident has occurred through a knot or splice being improperly formed, and even in tying an ordinary bundle or "roping" a trunk or box few people tie a knot that is secure and yet readily undone and quickly made. In a life of travel and adventure in out-of-the-way places, in yachting or boating, in hunting or fishing, and even in motoring, to command a number of good knots and splices is to make life safer, easier, and more enjoyable, aside from the real pleasure one may find in learning the interesting art of knot-tying.

Through countless ages the various forms of knots and fastenings for rope, cable, or cord have been developed; the best kinds being steadily improved and handed down from generation to generation, while the poor or inferior fastenings have been discarded by those whose callings required the use of cordage.

Gradually, too, each profession or trade has adopted the knots best suited to its requirements, and thus we find the Sailor's Knot; the Weaver's Knot; Fishermen's knots; Builders' knots; Butchers' knots; and many others which have taken their names from the use to which they are especially adapted.

In addition to these useful knots, there are many kinds of ornamental or fancy knots used in ornamenting the ends of ropes, decorating shrouds of vessels, railings, and similar objects; while certain braids or plaits, formed by a series of knots, are widely used aboard ship and on land.

In many cases ropes or cable must be joined in such a way that they present a smooth and even surface and for such purposes splices are used, while knots used merely as temporary fastenings and which must be readily and quickly tied and untied are commonly known as "bends" or "hitches." Oddly enough, it is far easier to tie a poor knot than a good one, and in ninety-nine cases out of a hundred the tyro, when attempting to join two ropes together, will tie either a "slippery" or a "jamming" knot and will seldom succeed in making a recognized and "ship-shape" knot of any sort.

The number of knots, ties, bends, hitches, splices, and shortenings in use is almost unlimited and they are most confusing and bewildering to the uninitiated. The most useful and ornamental, as well as the most reliable, are comparatively few in number, and in reality each knot learned leads readily to another; in the following pages I have endeavored to describe them in such a manner that their construction may be readily understood and mastered.

THE AUTHOR.

JANUARY, 1917.

CHAPTER I

CORDAGE

Before taking up the matter of knots and splices in detail it may be well to give attention to cordage in general. Cordage, in its broadest sense, includes all forms and kinds of rope, string, twine, cable, etc., formed of braided or twisted strands.

In making a rope or line the fibres (A, Fig. 1) of hemp, jute, cotton, or other material are loosely twisted together to form what is technically known as a "yarn" (B, Fig. 1). When two or more yarns are twisted together they form a "strand" (C, Fig. 1). Three or more strands form a rope (D, Fig. 1), and

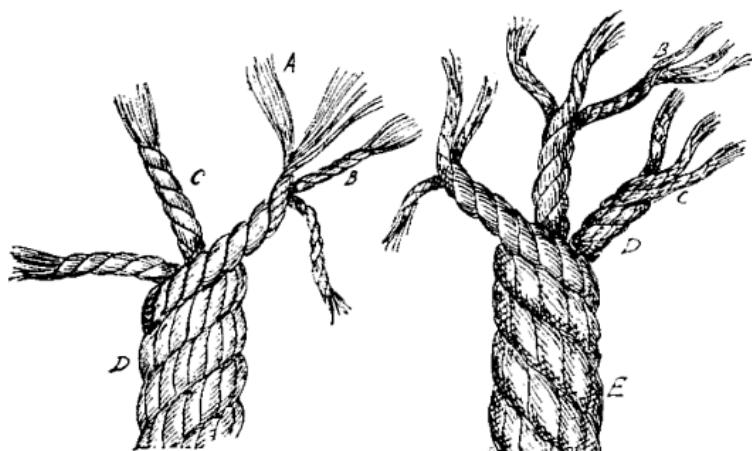


FIG. 1.—Construction of rope.

three ropes form a cable (E, Fig. 1). To form a strand the yarns are twisted together in the opposite direction from that in which the original fibres were twisted; to form a rope the strands are twisted in the opposite direction from the yarns of the strands, and to form a cable each rope is twisted opposite from the twist of the strands. In this way the natural tendency for each yarn, strand, or rope to untwist serves to bind or hold the whole firmly together (Fig. 1).

Rope is usually three-stranded and the strands turn from left to right or "with the sun," while cable is left-handed or twisted "against the sun" (E, Fig. 1). Certain ropes, such as "bolt-rope" and most cables, are laid around a "core" (F, Fig. 2) or central strand and in many cases are four-stranded (Fig. 2).

The strength of a rope depends largely upon the strength and length of the fibres from which it is made, but the amount each yarn and strand is twisted, as well as the method used in bleaching or preparing the fibres, has much to do with the strength of the finished line.

Roughly, the strength of ropes may be calculated by multiplying the circumference of the rope in inches by itself and the fifth part of the product will be the number of tons the rope will sustain. For example, if the rope is 5 inches in circumference, $5 \times 5 = 25$, one-fifth of which is 5, the number of tons that can safely be carried on a 5-inch rope. To ascertain the weight of ordinary "right hand" rope, multiply the circumference in inches by itself and multiply the result by the length of rope in fathoms and divide the product by 3.75. For example, to find the weight of a 5-inch rope, 50 fathoms in length: $5 \times 5 = 25$; $25 \times 50 = 1,250$; $1,250 \div 3.75 = 333\text{-}1/3$ lbs.

These figures apply to Manila or hemp rope, which is the kind commonly used, but jute, sisal-flax, grass, and silk are also used considerably. Cotton rope is seldom used save for small hand-lines, clothes-lines, twine, etc., while wire rope is largely used nowadays for rigging vessels, derricks, winches, etc., but as splicing wire rope is different from the method employed in fibre rope, and as knots have no place in wire rigging, we will not consider it.



FIG. 2.—Bolt-rope.

CHAPTER II

SIMPLE KNOTS AND BENDS

For convenience in handling rope and learning the various knots, ties, and bends, we use the terms "standing part," "bight," and "end" (Fig. 3). The *Standing Part* is the principal portion or longest part of the rope; the *Bight* is the part curved or bent while working or handling; while the *End* is that part used in forming the knot or hitch. Before commencing work the loose ends or strands of a rope should be "whipped" or "seized" to prevent the rope from unravelling; and although an expert can readily tie almost any knot, make a splice, or in fact do pretty nearly anything with a loose-ended rope, yet it is a wise plan to invariably whip the end of every rope, cable, or hawser to be handled, while a marline-spike, fid, or pointed stick will also prove of great help in working rope.

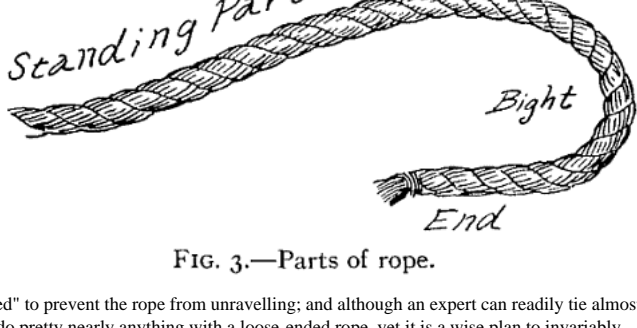


FIG. 3.—Parts of rope.

To whip or seize a rope-end, take a piece of twine or string and lay it on the rope an inch or two from the end, pass the twine several times around the rope, keeping the ends of the twine under the first few turns to hold it in place; then make a large loop with the free end of twine; bring it back to the rope and continue winding for three or four turns around both rope and end of twine; and then finish by drawing the loop tight by pulling on the free end (Fig. 4).



FIG. 4.—Whipping.

All knots are begun by "loops" or rings commonly known to mariners as "Cuckolds' Necks" (Fig. 5).

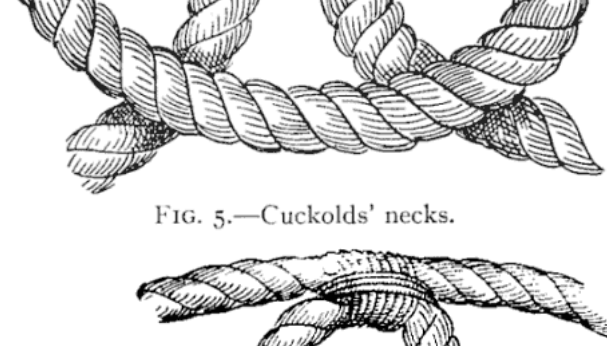


FIG. 5.—Cuckolds' necks.

These may be either overhand or underhand, and when a seizing or fastening of twine is placed around the two parts where they cross a useful rope ring known as a "clinch" is formed (Fig. 6).




FIG. 6.—Clinch.

If the loose end of the rope is passed over the standing part and through the "cuckold's-neck," the simplest of all knots, known as the "Overhand Knot," is made (Fig. 7). This drawn tight appears as in Fig. 8, and while so simple this knot is important, as it is frequently used in fastening the ends of yarns and strands in splicing, whipping, and seizing.




FIGS. 7 and 8.—Overhand knots.

The "Figure-Eight Knot" is almost as simple as the overhand and is plainly shown in Figs. 9 and 10.

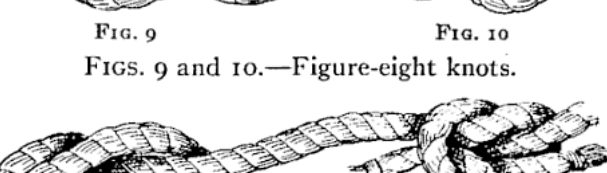

FIGS. 9 and 10.—Figure-eight knots.

Only a step beyond the figure-eight and the overhand knots are the "Square" and "Reefing" knots (Figs. 11 and 12). The square knot is probably the most useful and widely used of any common knot and is the best all-around knot known. It is very strong, never slips or becomes jammed, and is readily untied. To make a square knot, take the ends of the rope and pass the left end over and under the right end, then the right over and under the left.

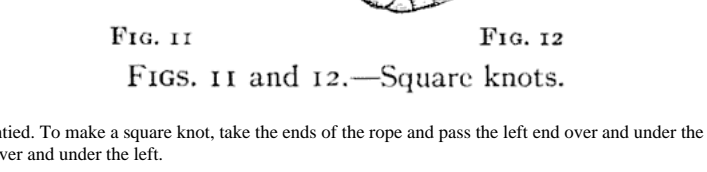

FIGS. 11 and 12.—Square knots.

If you once learn the simple formula of "Left over," "Right over," you will never make a mistake and form the despised "Granny," a most useless, bothersome, and deceptive makeshift for any purpose (Fig. 13). The true "Reef Knot" is merely the square knot with the bight of the left or right end used instead of the end itself. This enables the knot to be "cast off" more readily than the regular square knot (A, Fig. 12).

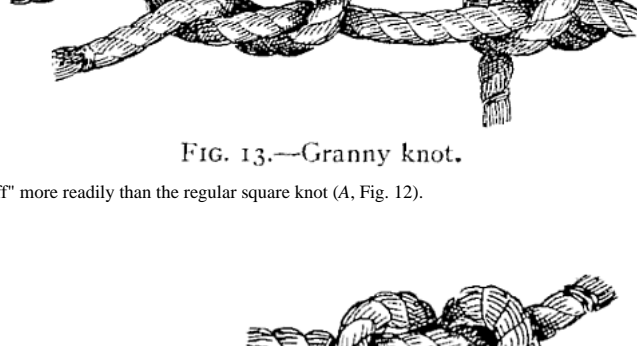


FIG. 13.—Granny knot.

Neither square nor reef knots, however, are reliable when tying two ropes of unequal size together, for under such conditions they will frequently slip and appear as in Fig. 14, and sooner or later will pull apart.

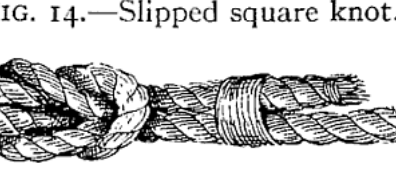


FIG. 14.—Slipped square knot.

To prevent this the ends may be tied or seized as shown in Fig. 15.



FIG. 15.—Square knot with ends seized.

A better way to join two ropes of unequal diameter is to use the "Open-hand Knot." This knot is shown in Fig. 16, and is very quickly and easily made; it never slips or gives, but is rather large and clumsy, and if too great a strain is put on the rope it is more likely to break at the knot than at any other spot.



FIG. 16.—Open-hand knots.

The "Fisherman's Knot," shown in Fig. 17, is a good knot and is formed by two simple overhand knots slipped over each rope, and when drawn taut appears as in Fig. 18.

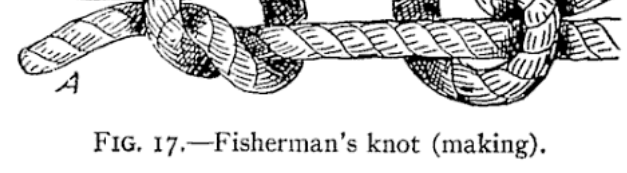


FIG. 17.—Fisherman's knot (making).

This is an important and valuable knot for anglers, as the two lines may be drawn apart by taking hold of the ends, A, B, and a third line for a sinker, or extra hook, may be inserted between them. In joining gut lines the knot should be left slightly open and the space between wrapped with silk. This is probably the strongest known method of fastening fine lines.

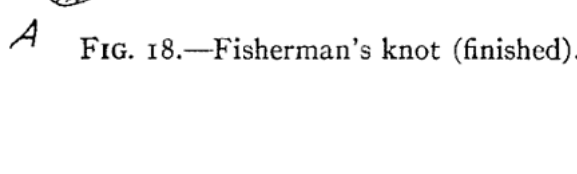


FIG. 18.—Fisherman's knot (finished).

The "Ordinary Knot," for fastening heavy ropes, is shown in Fig. 19.

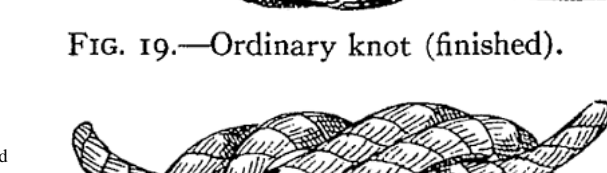


FIG. 19.—Ordinary knot (finished).

It is made by forming a simple knot and then interlacing the other rope or "following around," as shown in Fig. 20. This knot is very strong, will not slip, is easy to make, and does not strain the fibres of the rope. Moreover, ropes joined with this knot will pay out, or hang, in a straight line.

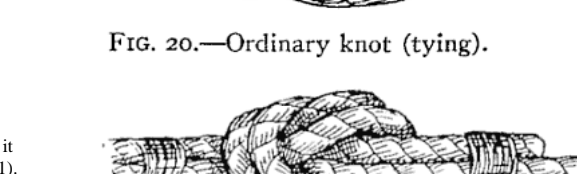


FIG. 20.—Ordinary knot (tying).

By whipping the ends to the standing parts it becomes a neat and handsome knot (Fig. 21).



FIG. 21.—Ordinary knot (seized).

The "Weaver's Knot" (Fig. 22) is more useful in joining small lines, or twine, than for rope, and for thread it is without doubt the best knot known.



FIG. 22.—Weaver's knot (complete).

The ends are crossed as in Fig. 23. The end A is then looped back over the end B, and the end B is slipped through loop C and drawn tight.



FIG. 23.—Weaver's knot (tying).

Another useful and handsome knot is illustrated in Fig. 24. This is a variation of the figure-eight knot, already described, and is used where there is too much rope, or where a simple knot is desired to prevent the rope running through an eye, ring, or tackle-block.



FIG. 24.—Double figure-eight knot (complete).

It is made by forming a regular figure eight and then "following round" with the other rope as in Fig. 25. It is then drawn taut and the ends seized to the standing part if desired.

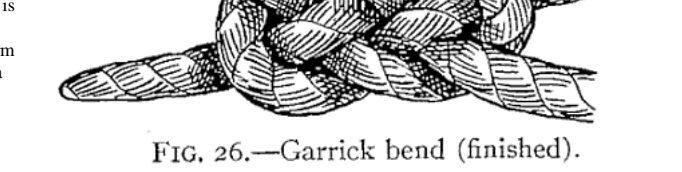


FIG. 25.—Double figure-eight knot (tying).

Sometimes we have occasion to join two heavy or stiff ropes or hawsers, and for this purpose the "Garrick Bend" (Fig. 26) is preeminently the best of all knots. To make this knot, form a bight by laying the end of a rope on top of and across the standing part.

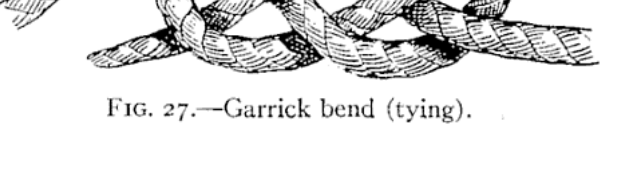


FIG. 26.—Garrick bend (finished).

Next take the end of the other rope and pass it through this bight, first down, then up, over the cross and down through the bight again, so that it comes out on the opposite side from the other end, thus bringing one end on top and the other below, as illustrated in Fig. 27. If the lines are very stiff or heavy the knot may be secured by seizing the ends to the standing parts.



FIG. 27.—Garrick bend (tying).

A much simpler and a far poorer knot is sometimes used in fastening two heavy ropes together. This is a simple hitch within a loop, as illustrated in Fig. 28, but while it has the advantage of being quickly and easily tied it is so inferior to the Garrick bend that I advise all to adopt the latter in its place.

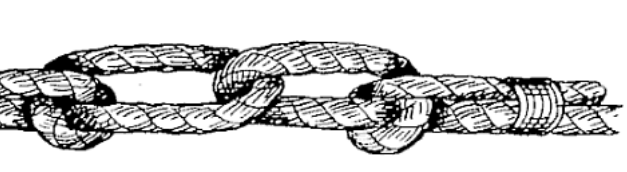


FIG. 28.—Simple hitch (hawser).

When two heavy lines are to be fastened for any considerable time, a good method is to use the "Half-hitch and Seizing," shown in Fig. 29.



FIG. 29.—Half-hitch and seizing.

This is a secure and easy method of fastening ropes together and it allows the rope to be handled more easily, and to pass around a winch or to be coiled much more readily, than when other knots are used.

CHAPTER III

TIES AND HITCHES

All the knots I have so far described are used mainly for fastening the two ends of a rope, or of two ropes, together. Of quite a different class are the knots used in making a rope fast to a stationary or solid object, and are known as "hitches" or "ties."

One of the easiest of this class to make and one which is very useful in fastening a boat or other object where it may be necessary to release it quickly is the "Lark's Head" (Fig. 30). To make this tie, pass a bight of your rope through the ring, or other object, to which you are making fast and then pass a marline-spike, a billet of wood, or any similar object through the sides of the bight and under or behind the standing part, as shown in A, Fig. 30.

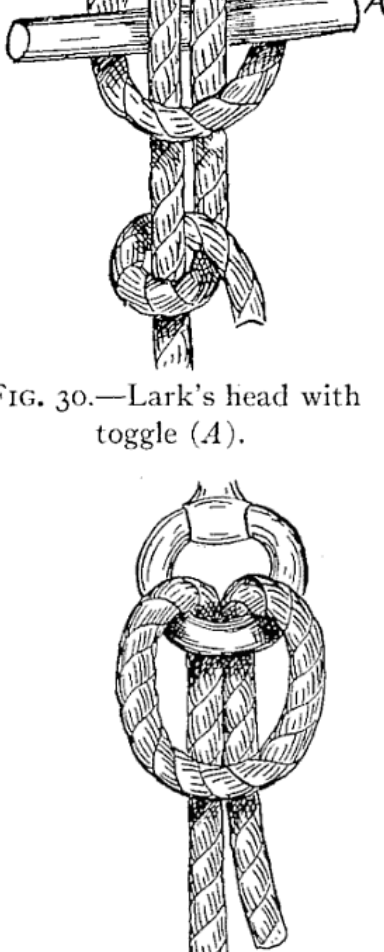


FIG. 30.—Lark's head with toggle (A).

The end of the rope may then be laid over and under the standing part and back over itself. This knot may be instantly released by merely pulling out the toggle.



FIG. 31.—Lark's head with toggle (A) withdrawn.

Almost as quickly made and unfastened is the "Slippery Hitch" (Fig. 32).

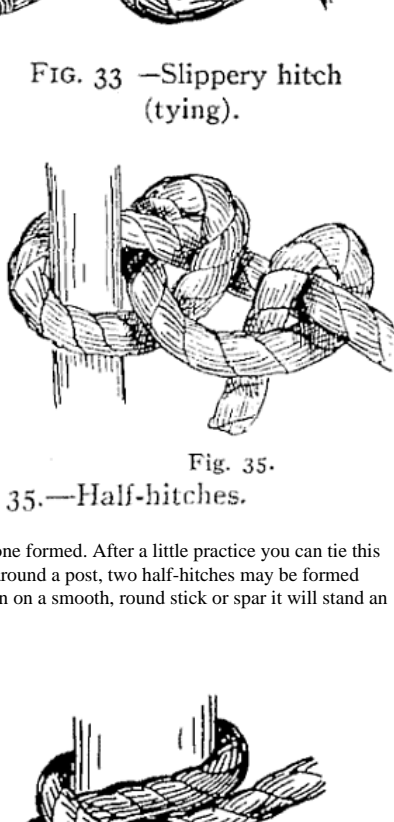


FIG. 32.—Slippery hitch (complete).

To make this, run the end of the rope through the ring or eye to which it is being fastened, then back over the standing part and pull A loop, or bight, back through the "cuckold's neck" thus formed (Fig. 33). To untie, merely pull on the free end.

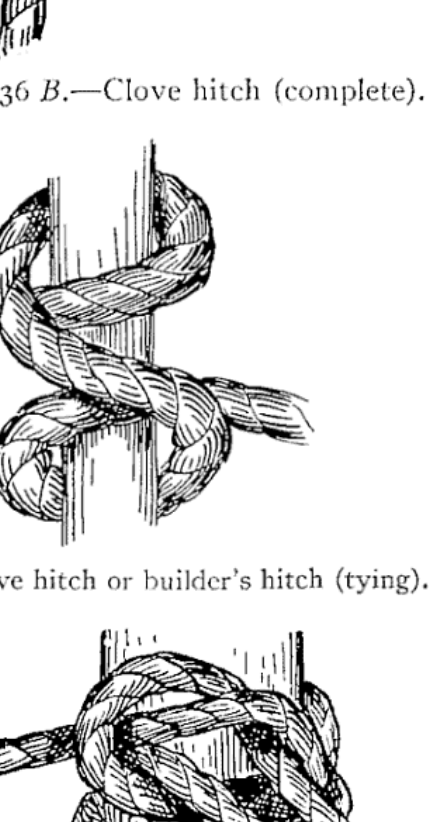


FIG. 33.—Slippery hitch (tying).

Two half-hitches, either around a post or timber or around the standing part of the rope, make an ideal and quickly tied fastening (Figs. 34 and 35). To make these, pass the end around the post, ring, or other object, then over and around the standing part between the post and itself, then under and around the standing part between its own loop and the first one formed. After a little practice you can tie this knot almost instantly and by merely throwing a couple of turns around a post, two half-hitches may be formed instantly. This knot will hold forever without loosening, and even on a smooth, round stick or spar it will stand an enormous strain without slipping.

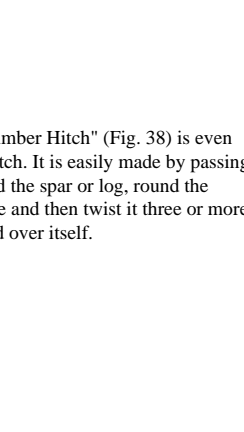


Fig. 34.

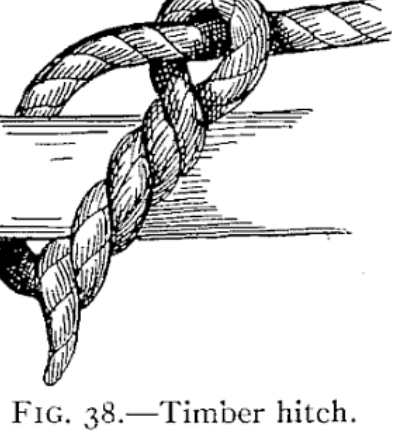


Fig. 35.

FIGS. 34 and 35.—Half-hitches.

A more secure knot for this same purpose is the "Clove Hitch" (Fig. 36), sometimes known as the "Builders' Hitch."

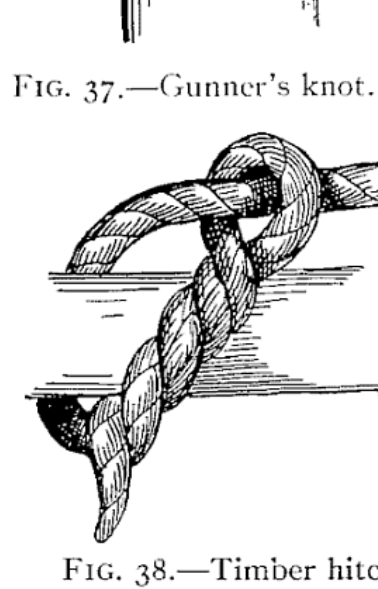


FIG. 36 B.—Clove hitch (complete).

To make this, pass the end of rope around the spar or timber, then over itself; over and around the spar, and pass the end under itself and between rope and spar, as shown in the illustration.

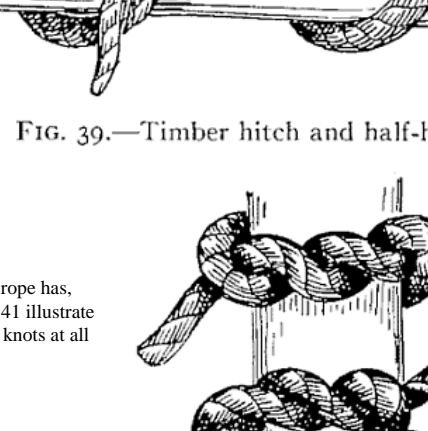


FIG. 36 A.—Clove hitch or builder's hitch (tying).

The Clove hitch with ends knotted becomes the "Gunners' Knot" (Fig. 37). These are among the most valuable and important of knots and are useful in a thousand and one places. The Clove hitch will hold fast on a smooth timber and is used extensively by builders for fastening the staging to the upright posts. It is also useful in making a tow-line fast to a wet spar, or timber, and even on a slimy and slippery spile it will seldom slip.

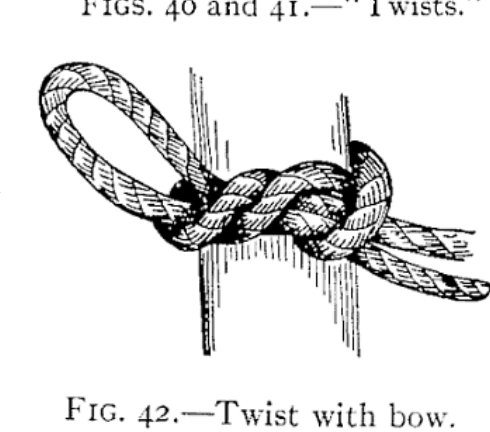


FIG. 37.—Gunner's knot.

For this purpose the "Timber Hitch" (Fig. 38) is even better than the Clove hitch. It is easily made by passing the end of a rope around the spar or log, round the standing part of the rope and then twist it three or more times around, under and over itself.

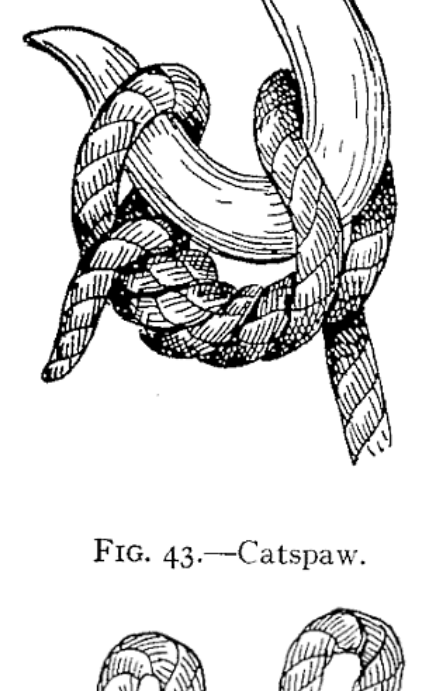


FIG. 38.—Timber hitch.

If you wish this still more secure, a single half-hitch may be taken with the line a couple of feet further along the spar (Fig. 39).


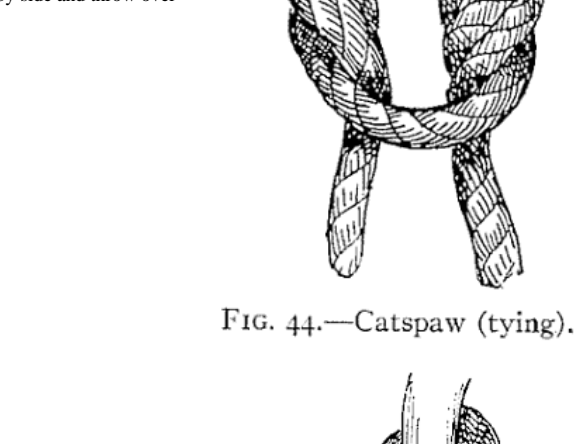


FIG. 39.—Timber hitch and half-hitch.

It is remarkable what power to grip a twisted rope has, and the "Twist Knots" shown in Figs. 40 and 41 illustrate two ways of making fast which are really not knots at all but merely twists.

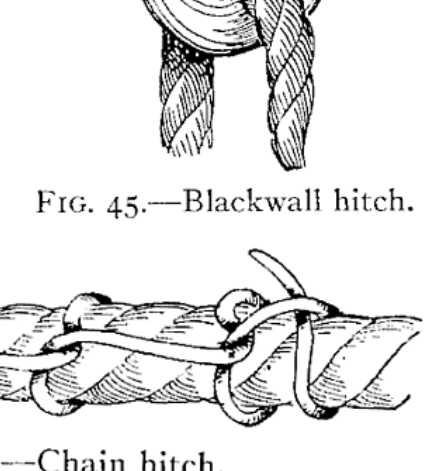

FIGS. 40 and 41.—"Twists."

These may be finished by a simple knot, or a bow-knot, as shown in Fig. 42, but they are likely to jam under great pressure and are mainly useful in tying packages, or bundles, with small cord, where the line must be held taut until the knot is completed.

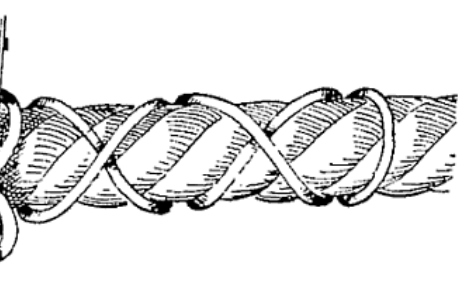


FIG. 42.—Twist with bow.

This principle of fastening by twisted rope is also utilized in the "Catspaw" (Fig. 43), a most useful knot or "hitch" for hoisting with a hook.

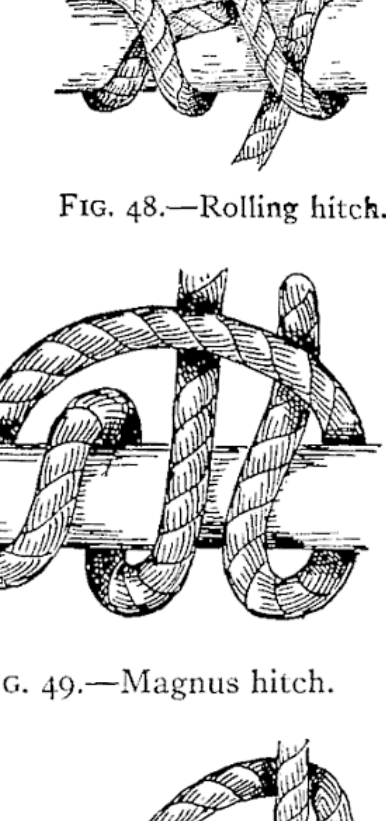


FIG. 43.—Catspaw.

To make this, pass the bight of your rope over the end and standing part, then, with a bight in each hand, take three twists from you, then bring the two bights side by side and throw over the hook (Fig. 44).



FIG. 44.—Catspaw (tying).

The "Blackwall Hitch" (Fig. 45) is still simpler and easier to make and merely consists of a loop, or cuckold's neck, with the end of rope passed underneath the standing part and across the hook so that as soon as pressure is exerted the standing part bears on the end and jams it against the hook.

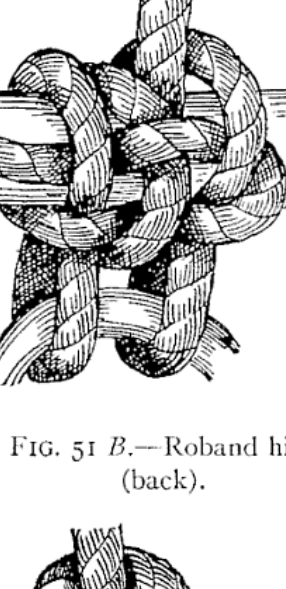


FIG. 45.—Blackwall hitch.

The "Chain Hitch" (Fig. 46) is a very strong method of fastening a line to a timber, or large rope, where one has a rope of sufficient length, and is used frequently to help haul in a large rope or for similar purposes.



FIG. 46.—Chain hitch.

It consists simply of a number of half-hitches taken at intervals around the object and is sometimes used with a lever or handspike, as shown in Fig. 47.

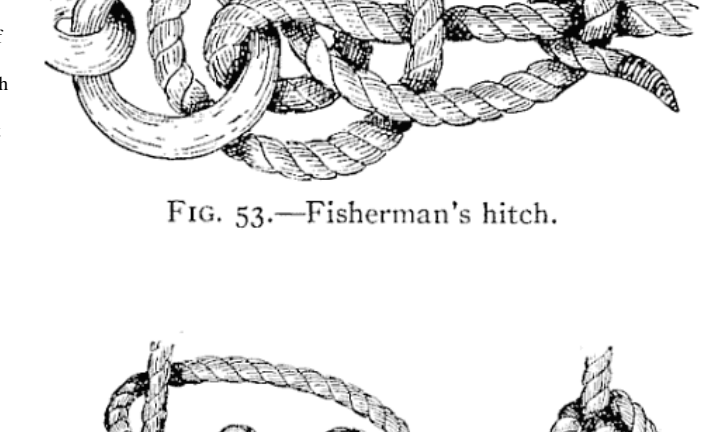


FIG. 47.—Chain hitch with bar.

The "Rolling Hitch" is a modified Clove hitch and is shown in Fig. 48.



FIG. 48.—Rolling hitch.

The "Magnus Hitch" (Fig. 49) is a method frequently used on shipboard for holding spars;



FIG. 49.—Magnus hitch.

and the "Studding-sail Bend" (Fig. 50) is also used for this purpose.

FIG. 50.—Studding-sail bend.

Occasions sometimes arise where a tackle, hook, ring, or another rope must be fastened to a beam by the same rope being used, and in such cases the "Roband Hitch" (Fig. 51) comes in very handy.

FIG. 51 A.—Roband hitch (front).

These are all so simple and easily understood from the figures that no explanation is necessary.

FIG. 51 B.—Roband hitch (back).

Almost as simple are the "Midshipman's Hitch" (Fig. 52), the "Fisherman's Hitch" (Fig. 53), and the "Gaff Topsail Halyard Bend" (Fig. 54). The midshipman's hitch is made by taking a half-hitch around the standing part and a round turn twice around above it.

FIG. 52.—Midshipman's hitch.

The fisherman's hitch is particularly useful in making fast large hawsers; with the end of a rope take two turns around a spar, or through a ring; take a half-hitch around the standing part and under all the turns; then a half-hitch round the standing part only and if desired seize the end to standing part.

FIG. 53.—Fisherman's hitch.

The gaff-topsail bend is formed by passing two turns around the yard and coming up on a third turn over both the first two turns; over its own part and one turn; then stick the end under the first turn.

FIG. 54.—Gaff-topsail halyard bend.

CHAPTER IV

NOOSES, LOOPS AND MOORING KNOTS

Nothing is more interesting to a landsman than the manner in which a sailor handles huge, dripping hawsers or cables and with a few deft turns makes then fast to a pier-head or spile, in such a way that the ship's winches, warping the huge structure to or from the dock, do not cause the slightest give or slip to the rope and yet, a moment later, with a few quick motions, the line is cast off, tightened up anew, or paid out as required.

Clove hitches, used as illustrated in Fig. 55, and known as the "Waterman's Knot," are often used, with a man holding the free end, for in this way a slight pull holds the knot fast, while a little slack gives the knot a chance to slip without giving way entirely and without exerting any appreciable pull on the man holding the end.

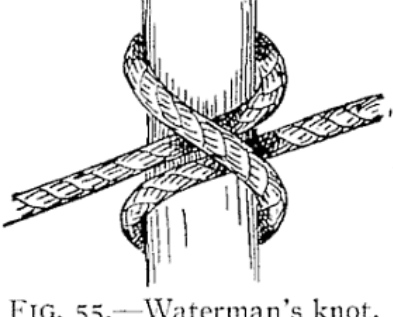


FIG. 55.—Waterman's knot.

"Larks' Heads" are also used in conjunction with a running noose, as shown in Fig. 56,

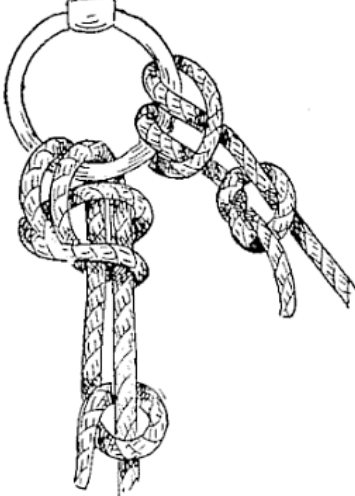


FIG. 56.—Larks' heads and running noose.

while a few turns under and over and around a cleat, or about two spiles, is a method easily understood and universally used by sailors (Fig. 57).

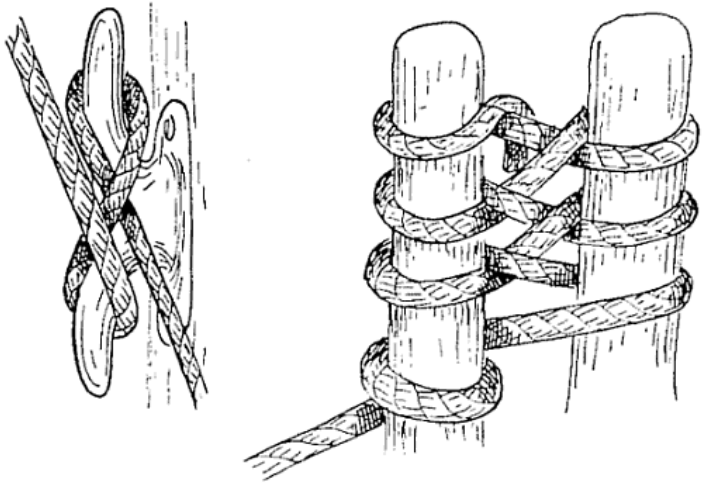


FIG. 57.—Cleat and wharf ties.

The sailor's knot par excellence, however, is the "Bow-line" (Fig. 58), and wherever we find sailors, or seamen, we will find this knot in one or another of its various forms. When you can readily and surely tie this knot every time, you may feel yourself on the road to "Marline-spike Seamanship," for it is a true sailor's knot and never slips, jams, or fails; is easily and quickly untied, and is useful in a hundred places around boats or in fact in any walk of life.

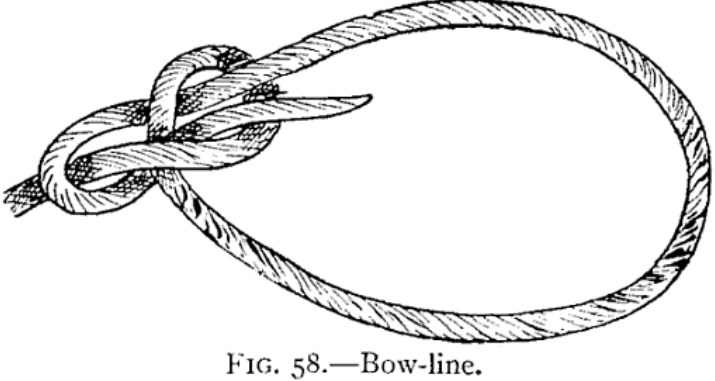


FIG. 58.—Bow-line.

The knot in its various stages is well shown in Fig. 59 and by following these illustrations you will understand it much better than by a description alone. In A the rope is shown with a bight or cuckold's neck formed with the end over the standing part. Pass A back through the bight, under, then over, then under, as shown in B, then over and down through the bight, as shown in C and D, and draw taut, as in E.

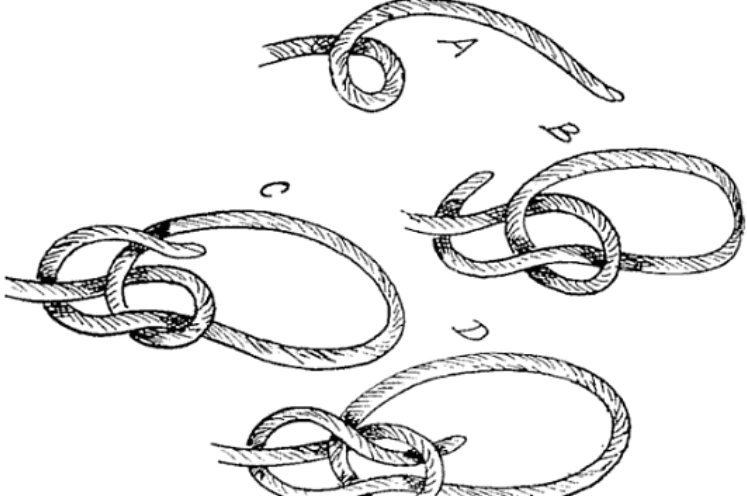


FIG. 59.—Tying bow-line.

The "Bow-line on a Bight" (Fig 60) is just as easily made and is very useful in slinging casks or barrels and in forming a seat for men to be lowered over cliffs, or buildings, or to be hoisted aloft aboard ship for painting, cleaning, or rigging.

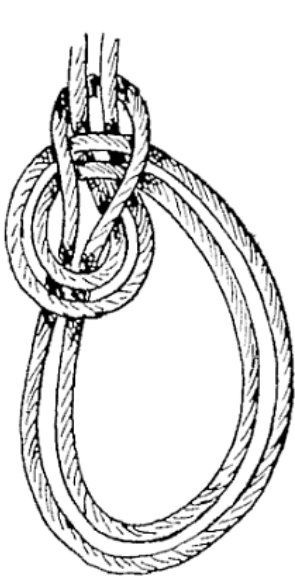


FIG. 60.—Bow-line on bight.

A "Running Bow-line" (Fig. 61) is merely a bow-line with the end passed through the loop, thus forming a slip knot.



FIG. 61.—Running bow-line.



FIG. 62.—Loop knot. FIG. 63.—Loop knot. FIG. 64.—Loop knot.

Other "Loops" are made as shown in Figs. 62-65, but none of these are as safe, sure, and useful as the bow-line.



FIG. 65.—Loop knot.

One of these knots, known as the "Tomfool Knot" (Fig. 66), is used as handcuffs and has become famous, owing to its having baffled a number of "Handcuff Kings" and other escapers who readily escaped from common knots and manacles. It is made like the running knot (Fig. 62), and the firm end is then passed through the open, simple knot so as to form a double loop or bow. If the hands or wrists are placed within these loops and the latter drawn taut, and the loose ends tied firmly around the central part, a pair of wonderfully secure handcuffs results.

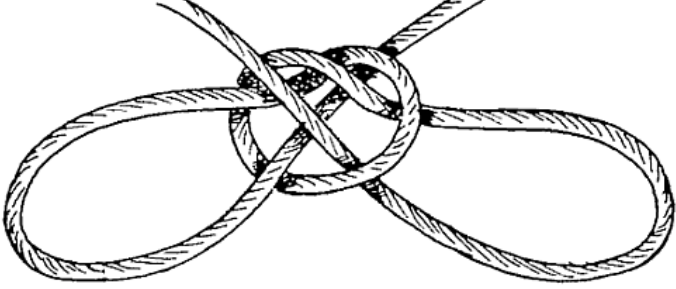


FIG. 66.—Tomfool knot.

CHAPTER V

SHORTENINGS, GROMMETS, AND SELVAGEES

In many cases a rope may prove too long for our use or the free ends may be awkward, or in the way. At such times a knowledge of "shortenings" is valuable. There are quite a variety of these useful knots, nearly all of which are rather handsome and ornamental, in fact a number of them are in constant use aboard ship merely for ornament.

The simplest form of shortening, shown in Fig. 67, is a variation of the common and simple overhand knot already described and illustrated.

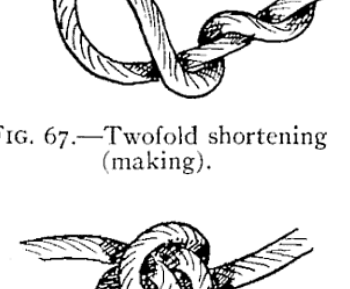


FIG. 67.—Twofold shortening (making).



FIG. 68.—Twofold shortening (taut).

These knots are formed by passing the end of a rope twice or more times through the loop of the simple knot and then drawing it tight (Fig. 68). They are known as "Double," "Treble," "Fourfold," or "Sixfold" knots and are used to prevent a rope from passing through a ring or block as well as for shortening.

All gradations from the double to the sixfold are shown in Fig. 69, both in process of making and as they appear when drawn taut.



FIG. 69.—Three- and fivefold shortening.

Another very simple form of shortening is shown in Fig. 70 and is known as the "Single Plait," or "Chain Knot." To make this shortening, make a running loop (A, Fig. 70), then draw a bight of the rope through this loop, as shown at B, draw another bight through this, as at C to D, and continue in this way until the rope is shortened to the desired length; the free end should then be fastened by passing a bit of stick through the last loop, F, or by running the free end through the last loop, as at E.

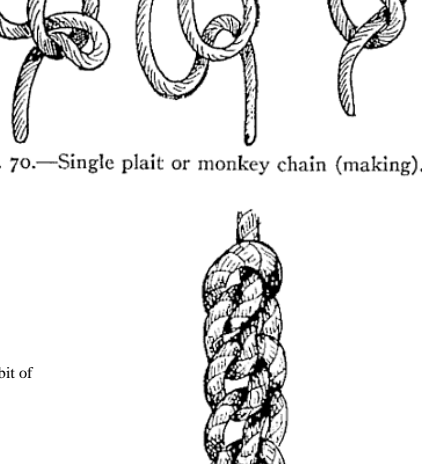


FIG. 70.—Single plait or monkey chain (making).

To undo this shortening, it is only necessary to slip out the free end, or the bit of wood, and pull on the end, when the entire knot will quickly unravel.

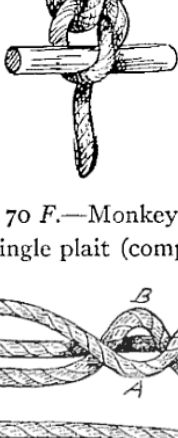


FIG. 70 F.—Monkey chain or single plait (complete).

The "Twist," or "Double Chain," is made in a similar manner but is commenced in a different way (A, Fig. 71). It may also be made with three separate pieces of line, as shown in B, Fig. 71.

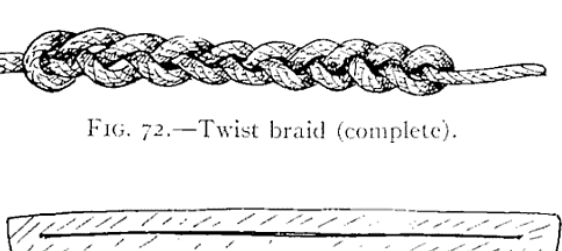


FIG. 71.—Twist braid (making).

Hold the double loop in the left hand; the part A is then brought over B; with a half turn B is crossed over to A, and then proceed as in the ordinary three-strand plait until the end of loop is reached, when the loose end is fastened by passing through the bight and the completed shortening appears as in Fig. 72.

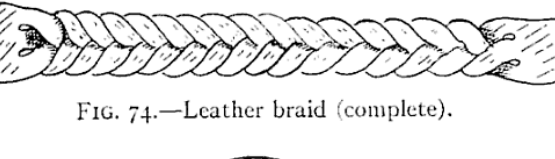


FIG. 72.—Twist braid (complete).

This same process is often used by Mexicans and Westerners in making bridles, headstalls, etc., of leather. The leather to be used is slit lengthwise from near one end to near the other, as shown in Fig. 73, and the braid is formed as described.



FIG. 73.—Leather cut to braid.

The result appears as in Fig. 74, and in this way the ends of the leather strap remain uncut, and thus much stronger and nearer than they would be were three separate strips used.




FIG. 74.—Leather braid (complete).

Another handsome knot for shortening is the more highly ornamental "Open Chain" (Fig. 75). Make the first loop of the rope secure by a twist of the rope and then pass the loose end through the preceding loop, to right and left alternately, until the knot is complete.

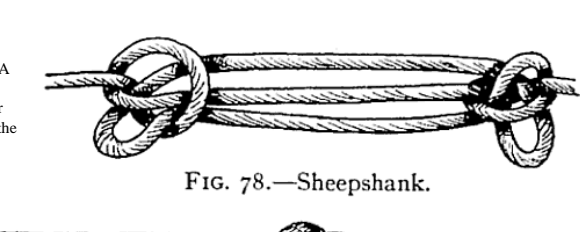


FIG. 75.—Open chain.

The simplest of all shortenings consists of a loop taken in the rope with the bights seized to the standing part (Fig. 76). This is particularly well adapted to heavy rope or where a shortening must be made quickly.




FIG. 76.—Seized shortening.

Fig. 77 shows another very simple shortening, which requires no description. This will not withstand a very great strain but is secure from untying by accident and is very useful for taking up spare rope of lashings on bundles or baggage.




FIG. 77.—Bow shortening.

"Sheepshanks," or "Dogshanks," are widely used for shortening rope, especially where both ends are fast, as they can be readily made in the centre of a tied rope. There are several forms of these useful knots.

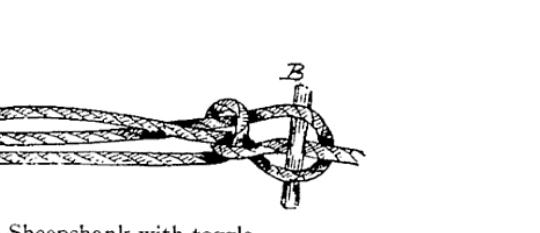


FIG. 78.—Sheepshank.

The best and most secure form is shown in Fig. 78. A simple running knot is first made; a bend is pushed through the loop, which is then drawn taut; the other end of the bend is fastened in a similar manner and the shortening is complete.



FIG. 79.—Another sheepshank.

A much simpler form is shown in Fig. 79, but this can hardly be depended upon unless the ends are seized, as shown in Fig. 80.



FIG. 80.—Sheepshank with ends seized.




FIG. 81.—Sheepshank for free-ended rope.



FIG. 82.—Sheepshank for free-ended rope.

Figs. 81-82 illustrate two other forms of shortenings, but these can only be used where the end of the rope is free, and are intended for more permanent fastenings than the ordinary sheepshank; while Fig. 83 is particularly adapted to be cast loose at a moment's notice by jerking out the toggles, A, B.





FIG. 83.—Sheepshank with toggle.

Grommets are round, endless rings of rope useful in a myriad ways aboard ship as well as ashore. They are often used as handles for chests, for rings with which to play quoits, to lengthen rope, and in many similar ways. The grommet is formed of a single strand of rope five times as long as the circumference of the grommet when complete.

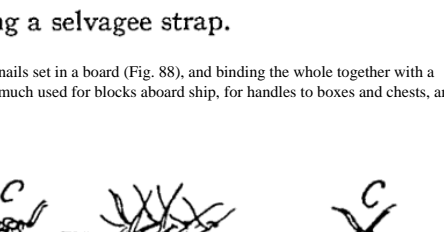

FIGS. 84, 85, and 86.—Grommet complete and making.




FIG. 87.—Selvagee strap.

A "Selvagee" or "Selvagee" strap is another kind of ring (Fig. 87).




FIG. 88.—Selvagee board.



FIG. 89.—Seizing a selvagee strap.

A "Flemish Eye" (Fig. 90) is an eye made in a manner much like that employed in forming the selvagee strap. Take a spar or piece of wood the size of the intended eye A. Around this wood lay a number of pieces of yarn or marline, B, B, B, and fasten them by tying with twice as at C. Whip the piece of rope in which eye is to be formed and unravel and open out the strands as at D. Lap the yarns over the wood and the stops E, worm the free ends under and over and then bring up the ends of the stops B and tie around the strands of eye as shown.

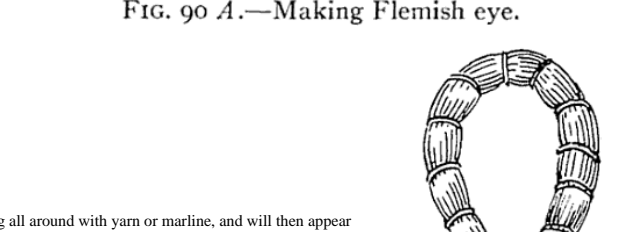


FIG. 90 A.—Making Flemish eye.

The eye may be finished neatly by whipping all around with yarn or marline, and will then appear as in Fig. 90 B.

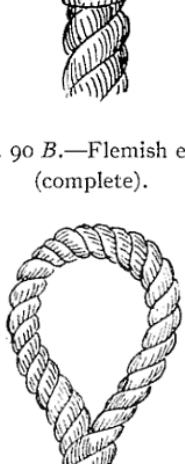


FIG. 90 B.—Flemish eye (complete).

An "Artificial Eye" (Fig. 91) is still another form of eye which will be found useful and in some ways easier and quicker to make than a spliced eye, besides being stronger.

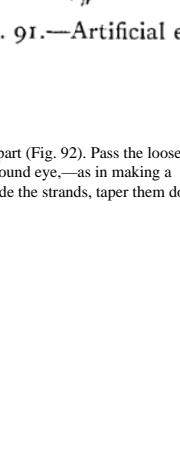


FIG. 91.—Artificial eye.

Take the end of a rope and unlay one strand; place the two remaining strands back alongside the standing part (Fig. 92). Pass the loose strand which has been unlayed over the end, and follow around the spaces between the two strands and then around eye,—as in making a grommet,—until it returns down the standing part and lies under the eye with the strands (Fig. 93). Then divide the strands, taper them down, and whip the whole with yarn or marline (Fig. 94).




FIG. 92




FIG. 93

FIGS. 92 and 93.—Making artificial eye.




FIG. 94.—Artificial eye (whipped).

Still another eye which at times will be useful is the "Throat Seizing," shown in Fig. 95. This is made by opening the end slightly and lashing it to the standing part as shown. Another ring sometimes used is illustrated in Fig. 96, and is easily and quickly made by lashing the two ends of a short rope to the standing part of another. Cuckolds' necks with lashings or "Clinches" are also used for the same purpose.

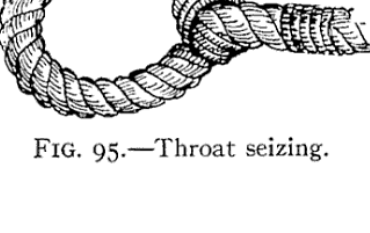


FIG. 95.—Throat seizing.




FIG. 96.—Lashed cut-splice.

CHAPTER VI

LASHINGS, SEIZINGS, SPLICES, ETC.

Almost any one can lash a rope more or less satisfactorily, but a knowledge of how to do this properly and in the manner best suited to each case is of great importance to seamen and others having occasion to handle ropes, rigging, or in fact any cordage.

The varieties of lashings, seizings, whippings, and servings are almost innumerable, but a few of the best and most frequently used are the "Wedding Knot" or "Rose Lashing," the "Deadeye Lashing," the "Deadeye Lashing," the "Belaying-pin Splice," the "Necklace Tie," the "Close Band," and "End Pointings."

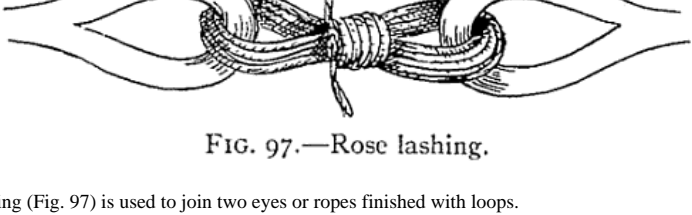


FIG. 97.—Rose lashing.

The rose lashing (Fig. 97) is used to join two eyes or ropes finished with loops.

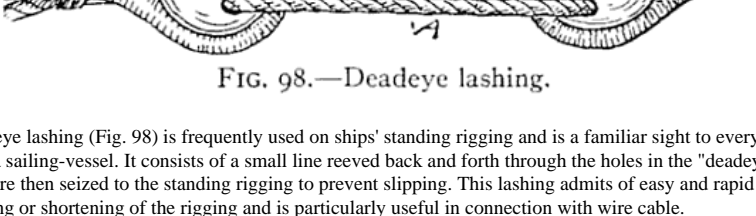


FIG. 98.—Deadeye lashing.

The deadeye lashing (Fig. 98) is frequently used on ships' standing rigging and is a familiar sight to every one who has seen a sailing-vessel. It consists of a small line reeved back and forth through the holes in the "deadeyes," A; the ends are then seized to the standing rigging to prevent slipping. This lashing admits of easy and rapid lengthening or shortening of the rigging and is particularly useful in connection with wire cable.




FIG. 99.—Loop lashing.

A similar method may be used with loops instead of deadeyes (Fig. 99).




FIG. 100.—Belaying-pin splice.

The belaying-pin splice, shown in Fig. 100, is a quick and handy way of fastening two ropes together and is of great value when rigging is carried away and some quick method of joining the severed ends is required. Pass a belaying-pin or similar toggle through an eye or loop in one end of a rope and pass this through a loop or eye in the broken rope end. Form a loop in the other broken end, slip the free end of the lanyard through this and around another toggle or pin and haul taut; then fasten by half-hitches around standing part (A, Fig. 100), or by seizing (B, Fig. 100). This is a strong, reliable fastening and can be tightened up or instantly thrown off at will.

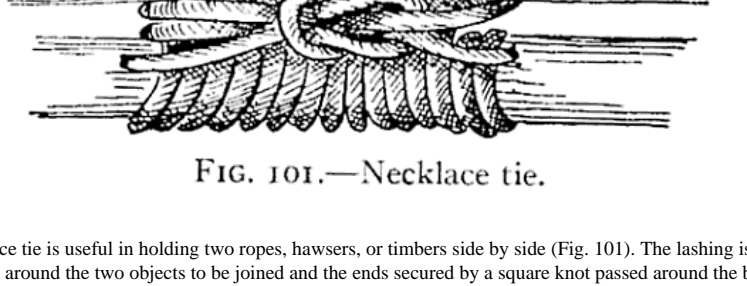


FIG. 101.—Necklace tie.

The necklace tie is useful in holding two ropes, hawsers, or timbers side by side (Fig. 101). The lashing is passed around and around the two objects to be joined and the ends secured by a square knot passed around the band lengthwise.

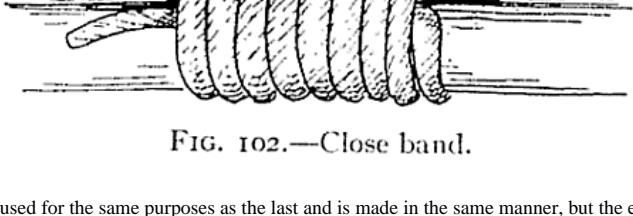


FIG. 102.—Close band.

The close band is used for the same purposes as the last and is made in the same manner, but the ends are fastened by drawing through beneath the turns (Fig. 102).

End pointings are very useful as well as ornamental, for while an ordinary seizing or whipping will prevent the strands from unravelling, the ends are broad and clumsy and oftentimes are too large to pass through a block or eye large enough for the rest of the rope. The ordinary way of pointing a rope is to first whip as described (Fig. 4), and then unlay the end as for the Flemish eye. Take out about two-thirds of the yarns and twist each in two. Take two parts of different yarns and twist together with finger and thumb, keeping the lay on the yarn and thus forming left-handed stuff known as "nettles." Comb out the rest of the yarn with a knife, leaving a few to lay back upon the rope. Now pass three turns of twine like a timber-hitch tightly around the part where the nettles separate and fasten the twine, and while passing this "warp" lay the nettles backward and forward with each turn. The ends are now whipped with twine or yarn and finally "snaked," which is done by taking the end under and over the outer turns of the seizing alternately. If the rope is small a stick is often put in the upper part to strengthen it or the tip maybe finished with a small eye. If properly done a pointed rope is very handsome and appears as in B, Fig. 103.

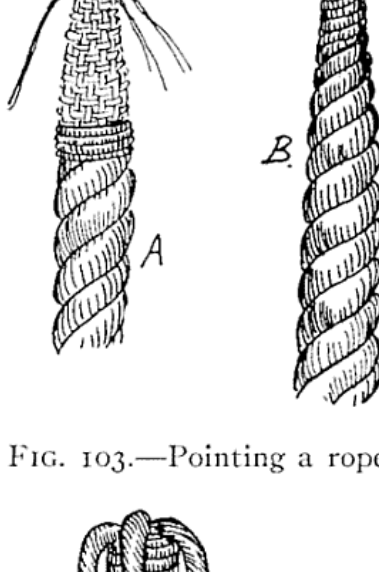


FIG. 103.—Pointing a rope.




FIG. 104.—Ending rope.



FIG. 105.—Ending rope.

Another simple way of finishing a rope end is to seize the end, as at A, Fig. 104, and open out the strands, bring the strands back alongside the rope, and whip the whole (Fig. 105).

Splicing is, in many cases, more useful and better than tying or bending ropes together and a good splice always looks neater and more ship-shape than a knot, no matter how well-made it may be. A person familiar with splicing will turn in a splice almost as quickly as the ordinary man can tie a secure knot, and in many cases, where the rope must pass through sheaves or blocks, a splice is absolutely necessary to fasten two ropes or two parts of a parted rope together.

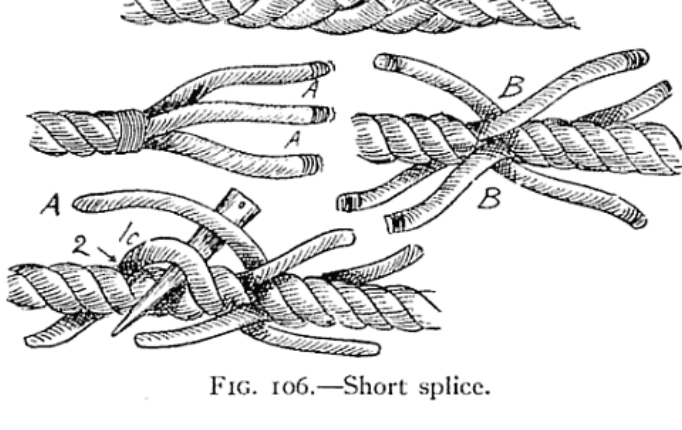


FIG. 106.—Short splice.

The simplest of all splices is known as the "Short Splice" (Fig. 106). This is made as follows: Untwist the ends of the rope for a few inches and seize with twine to prevent further unwinding, as shown at A, A; also seize the end of each strand to prevent unravelling and grease or wax the strands until smooth and even. Now place the two ends of the ropes together as shown at B, B. Then with a marline-spike, or a pointed stick, work open the strand 1c, and through this pass the strand A of the other rope; then open strand 2 and pass the next strand of the same way. Finally through it and then the same way with the third strand. Next open up the strands of the other rope, below the seizing, and pass the strands of the first rope through as before, 3 A, B.

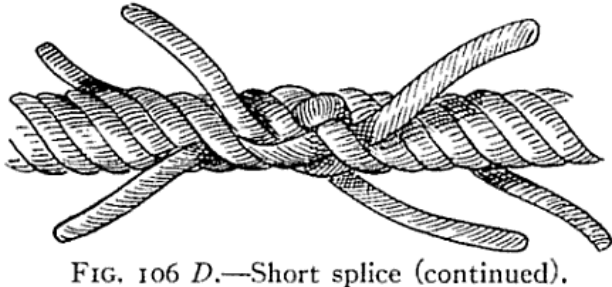


FIG. 106 D.—Short splice (continued).

The ropes will now appear as in Fig. 106, D. Now untwist the six strands and cut away about half the yarns from each and seize the ends as before; pass these reduced strands through under the whole strands of the rope—the strands of the left under the strands of the right rope and *vice versa*—for two or three lays and then cut off projecting ends, after drawing all as tight as you can. If an extra-neat splice is desired the strands should be gradually tapered. The only difficulty you will find in this way a splice but little larger than the original diameter of the rope will appear as at D and E. Take off the two central strands, F and G, and lay them into the grooves, D, E, until they meet B and C, and be sure and keep them tightly twisted while so doing. Then take strands H and J, cut out half the yarns in each, make an overhand knot in them and tuck the ends under the next lays as in a short splice. Do the same with strands B, C and F, G; dividing, knotting, and sticking the divided strands in the same way. Finally stretch the rope tight, pull and pound and roll the splice until smooth and round, and trim off all loose ends close to the rope.

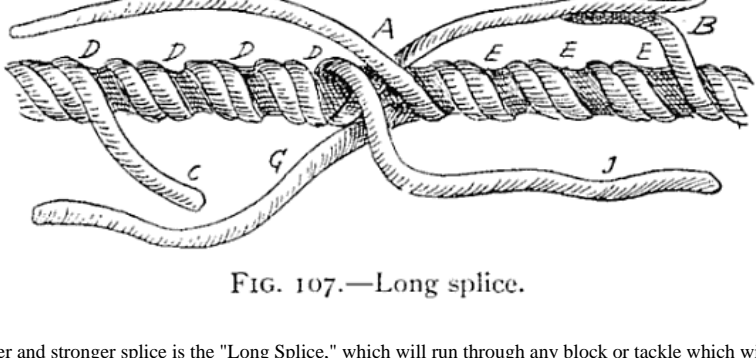


FIG. 107.—Long splice.

A far better and stronger splice is the "Long Splice," which will run through any block or tackle which will admit the rope itself; indeed, a well-made long splice cannot be distinguished from the rope itself after a few days' use (Fig. 107). To make this useful splice, unlay the ends of the rope about four times as much as for the short splice, or from four to five feet, unlay one strand in each rope for half as much again; place the middle strands together as at A, then the additional strands will appear as at B and C, and the spiral groove, left where they were unlayed, will appear as at D and E. Take off the two central strands, F and G, and lay them into the grooves, D, E, until they meet B and C, and be sure and keep them tightly twisted while so doing. Then take strands H and J, cut out half the yarns in each, make an overhand knot in them and tuck the ends under the next lays as in a short splice. Do the same with strands B, C and F, G; dividing, knotting, and sticking the divided strands in the same way. Finally stretch the rope tight, pull and pound and roll the splice until smooth and round, and trim off all loose ends close to the rope.



FIG. 108.—Eye splice.

A "Cut Splice" (Fig. 109) is made just as an eye splice or short splice, but instead of splicing two ropes together end to end, or splicing an end into a standing part, the ends are lapped and each is spliced into the standing part of the other, thus forming a loop or eye in the centre of a rope. Once the short and long splices are mastered, all other splices, as well as many useful variations, will come easy. Oftentimes, for example, one strand of a rope may become worn, frayed, or broken, while the remaining strands are perfectly sound. In such cases the weak strand may be unlayed and cut off and then a new strand of the same length is laid up in the groove left by the old strand exactly as in a long splice; the ends are then tapered, stuck under the lay, as in a short splice, and the repair is complete; and if well done will never show and will be as strong as the original rope.



FIG. 109.—Cut splice.

CHAPTER VII

FANCY KNOTS AND ROPE WORK

The knots and splices described above are all more for practical use than ornament, although such shortenings as the Single and Double plait, the Chain knots, the Twofold, Fourfold, and Sixfold knots, and others are often used for ornamental purposes only. A certain class of knots are, however, really ornamental and seldom serve to fasten two ropes together, or to make any object fast to another. They are, however, very useful in many ways, especially aboard ship, and they are so handsome and interesting that every one interested in rope work should learn to make them.

The simplest of the fancy knots is known as the "Single Crown" (Fig. 110). To form this knot unlay the strands of a new, flexible rope for six to eight inches and whip the ends of each strand, as well as the standing part, to prevent further untwisting.



FIG. 110.—Single crown.

Hold the rope in your left hand and fold one strand over and away from you, as shown in A, Fig. 111. Then fold the next strand over A (see B, Fig. 111), and then, while holding these in place with thumb and finger, pass the strand C over strand B, and through the bight of A as shown in the illustration. Now pull all ends tight and work the bights up smooth and snug; cut off ends and the knot is complete. This single crown is a very poor knot to stand by itself, however, and is mainly valuable as a basis for other more complicated knots and for ending up rope.



FIG. 111.—Single crown (making).

To end up a rope with a crown it is merely necessary to leave the projecting ends long and then by bringing them down tuck under the strands of the standing part, as shown in Fig. 112.

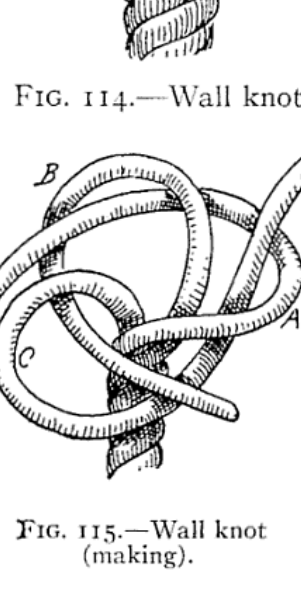


FIG. 112.—Single crown tucked (making).

Then halve the strands and tuck again, as in making a short splice, until the result appears as in Fig. 113. This makes a neat, handy, and ship-shape finish to a rope's end and is very useful for painters, halyards, etc. It will never work loose like a seizing and is quickly put on at any time, whereas to make a seizing one must be provided with small stuff of some sort, and this is frequently not at hand.

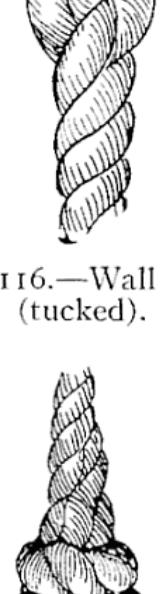


FIG. 113.—Single crown tucked (complete).

The "Wall Knot" (Fig. 114) is almost as simple as the crown, and in fact is practically a crown reversed.



FIG. 114.—Wall knot.

In making this knot bring C downward and across the standing part; then bring A over C and around standing part and finally bring B over A and up through bight of C, Fig. 115.

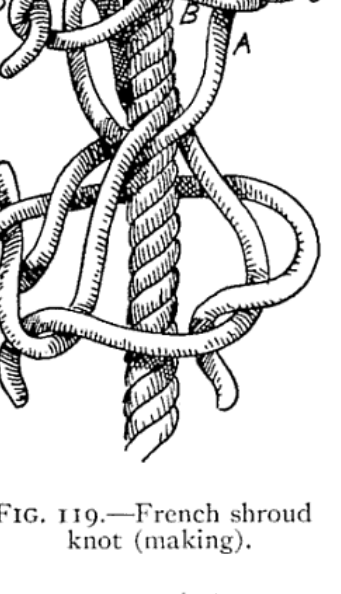


FIG. 115.—Wall knot (making).

When drawn snug the ends may be trimmed off close or they may be tucked and tapered as in the crown and will then appear as in Fig. 116.

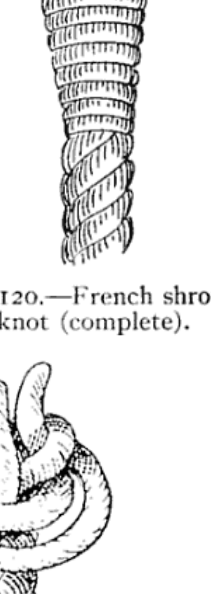


FIG. 116.—Wall knot (tucked).

As in the case of the crown knot, the wall is mainly of value as an ending when ends are tucked, or as a basis for more ornamental knots such as the "Wall and Crown," or "Double Wall," or "Double Crown." It is also very largely used in making "Shroud Knots" (Fig. 117).

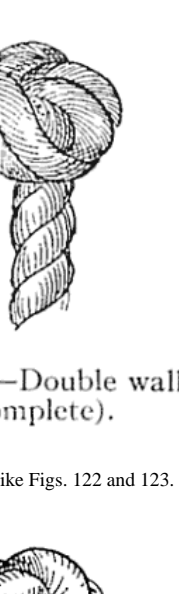


FIG. 117.—Shroud knot (complete).

The common shroud knot is made by opening up the strands of a rope's end as for a short splice and placing the two ends together in the same way. Then single "wall" the strands of one rope around the standing part of another against the lay, taper the ends, and tuck and serve all with yarn or marline (Fig. 118).



FIG. 118.—Shroud knot (making).

The "French Shroud Knot" is far neater and better, but is a little harder to make. Open up the strands and place closely together as for the short splice; make a loop of strand A, pass the end of B through the bight of A, as at C, make a loop of strand D, and pass the end of strand A through it as at D; then pass the end of strand D through the bight of strand B and one side is complete.

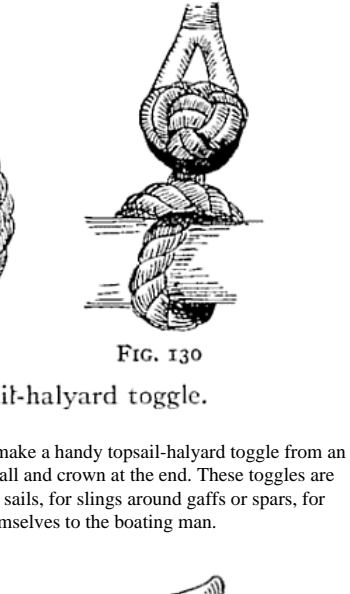


FIG. 119.—French shroud knot (making).

Repeat the operation on the other side, draw all parts taut, and taper and tuck the ends. The whole should then be served carefully and the finished knot will appear as in Fig. 120.



FIG. 120.—French shroud knot (complete).

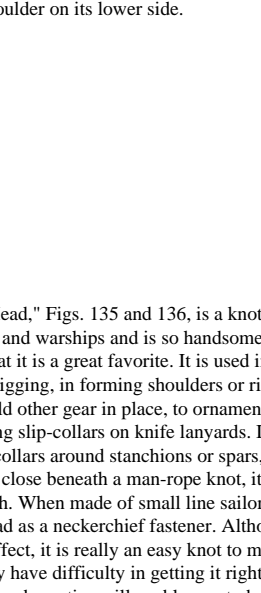


FIG. 121 A.—Making double crown.

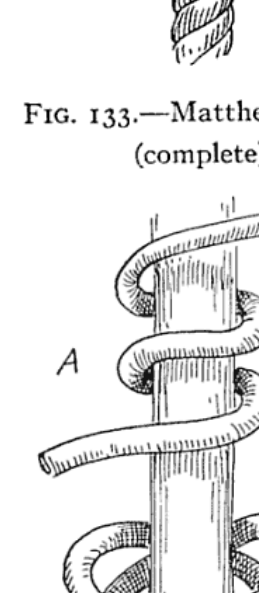


FIG. 121 B.—Making double wall.

Double wall and double crown as well as the beautiful double wall-and-crown knots are made exactly like the single crown or wall but instead of trimming off or tucking the ends they are carried around a second time following the lay of the first, as shown in Fig. 121, which shows the construction of a double crown at A, and a double wall at B.




FIG. 122.—Double crown (complete).



FIG. 123.—Double wall (complete).

When finished, the ends may be tucked or trimmed and the two knots will look like Figs. 122 and 123.

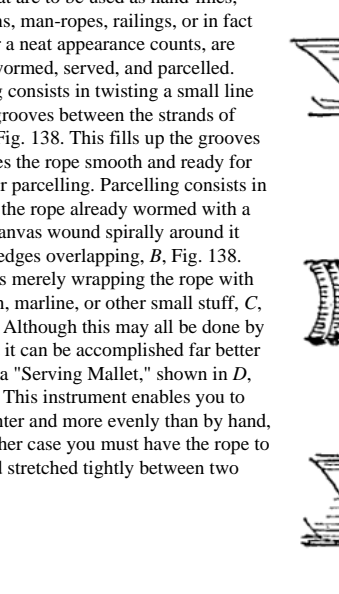


FIG. 124.—Wall crowned (making).




FIG. 125.—Wall crowned (complete).

A far better effect is obtained by "Crowning" a wall knot. This is done by first making a single wall knot and then by bringing strand A up over the top and laying B across A and bringing C over B and through the bight of A; a crown knot is formed above the wall, as shown in Figs. 124 and 125.



FIG. 126.—Double wall and crown.




FIG. 127.—Double wall and crown (complete).

This is the foundation of the most beautiful of rope-end knots, known as the "Double Wall and Crown," or "Manrope Knot," illustrated in Fig. 126. Make your single wall and crown it, but leave the strands all slack; then pass the ends up and through the bights of the slack single-wall knot and then push them alongside the strands in the single crown; pushing them through the same bight in the crown and downward through the walling. This may seem quite difficult, but if you have learned the wall and crown you will find it simple enough, for it is really merely "following" the strands of the single wall and crown. The result, if properly done, and ends drawn tight and cut off closely, is surprising, and to the uninitiated most perplexing, for if the ends are tapered and tucked through the standing part of the rope, as shown in Fig. 127, there will be no sign of a beginning or ending to this knot. This is probably the most useful of decorative knots and is largely used aboard ship for finishing the ends of rope railings, the ends of man-ropes, for the ends of yoke-lines and to form "stoppers" or "toggles" to bucket handles, slings, etc.

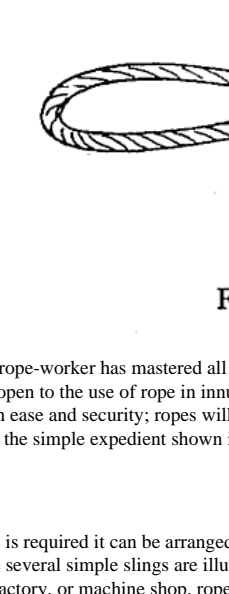


FIG. 128

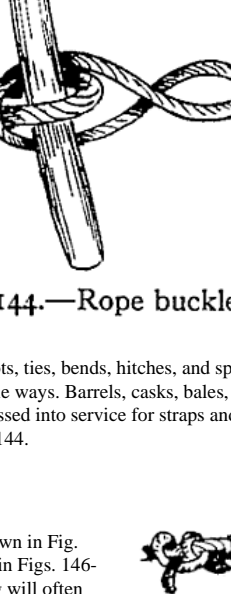


FIG. 129

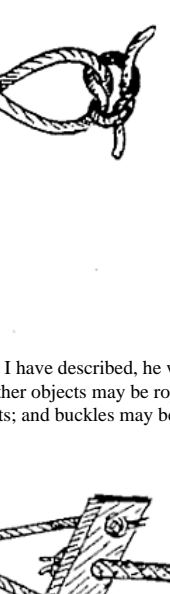


FIG. 130

FIGS. 128, 129, and 130.—Topsail-halyard toggle.

Its use in this way is illustrated in Figs. 128-130, which show how to make a handy topsail-halyard toggle for an eye splice turned in a short piece of rope and finished with a double wall and crown at the end. These toggles are very useful about small boats, as they may be used as stops for furling sails, for slings around gaffs or spars, for hoisting, and in a variety of other ways which will at once suggest themselves to the boating man.

The most difficult of ending knots and one which you should certainly learn is the "Matthew Walker" (Fig. 131), also known as the "Stopper Knot." To form this splendid knot, pass one strand around the standing part of the knot and through its own bight, then pass B underneath and through bight of A and through its own bight also; next pass C underneath and around and through the bights of A, B, and its own bight.

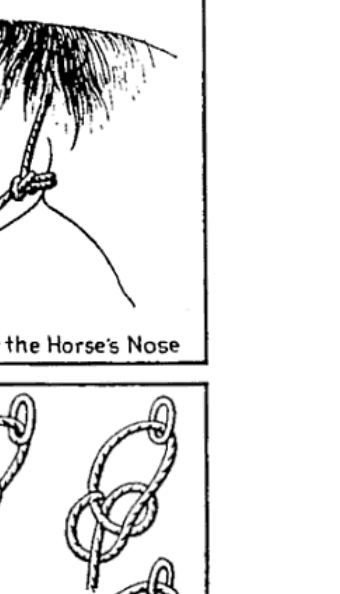


FIG. 131.—Matthew Walker (making).

The knot will now appear as in Fig. 132, but by carefully hauling the ends around and working the bight taut a little at a time the knot will assume the appearance shown in Fig. 133.

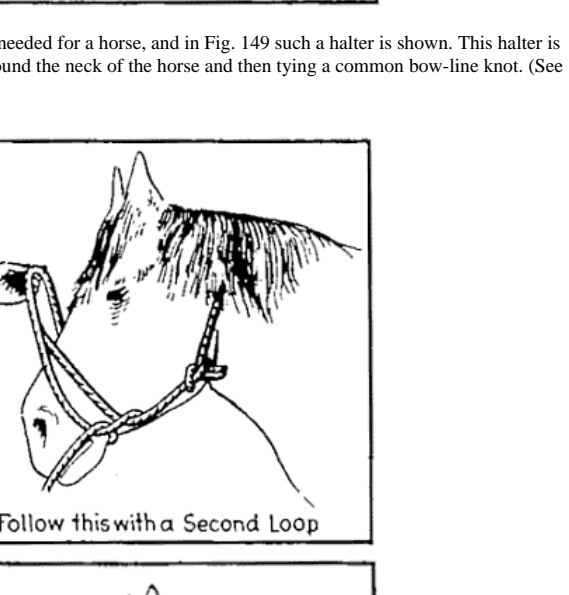


FIG. 132.—Matthew Walker (complete but slack).

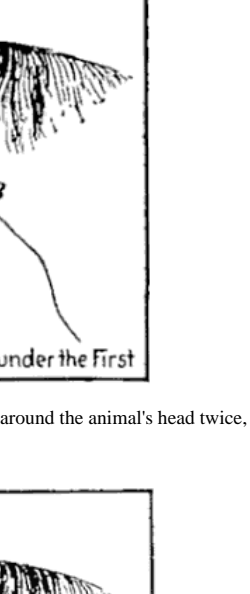


FIG. 133.—Matthew Walker (complete).

This is a handsome and useful knot and is widely used on ends of ropes where they pass through holes, as for bucket handles, ropes for trap-door handles, chocks, etc. The knot is well adapted for such purposes, as it is hard, close, and presents an almost flat shoulder on its lower side.

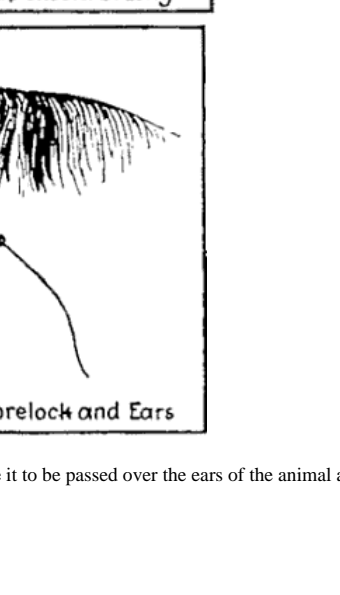


FIG. 135.—Making Turk's head.

The "Turk's Head," Figs. 135 and 136, is a knot much used aboard yachts and warships and is so handsome and ornamental that it is a great favorite. It is used in ornamenting rigging, in forming shoulders or rings on stays or ropes to hold other gear in place, to ornament yoke lines, and for forming slip-collars on knife lanyards. It is also used to form collars around stanchions or spars, and placed around a rope close beneath a man-rope knot, it gives a beautiful finish. When made of small line sailors often use the Turk's Head as a neck fastener. Although so elaborate in effect, it is really an easy knot to make, and while you may have difficulty in getting it right at first a little patience and practice will enable you to become proficient and capable of tying it rapidly and easily in any place or position.

To make a Turk's Head, have a smooth, round stick, or other object, and some closely twisted or braided small line. Pass two turns of the line around the rod, A, Fig. 135, from left to right, and pass the upper bight down through the lower and reeve the upper end down through it, as at B. Then pass the bight up again and run the end over the lower bight and up between it and the upper bight. Turn the upper bight again through the lower one and pass the end over what is now the upper bight and between it and the lower, C, Fig. 135.

FIG. 136.—Turks' heads.

A variation of the knot may be formed by making the first part as described and then by slipping the knot to the end of the rod; work one side tighter than the other until the "Head" forms a complete cap, as shown in Fig. 137. This makes a splendid finish for the ends of flagpoles, stanchions, etc.

FIG. 137.—Turk's cap.

Ropes that are to be used as hand-lines, stanchions, man-ropes, railings, or in fact wherever a neat appearance counts, are usually wormed, served, and parcellled. Worming consists in twisting a small line into the grooves between the strands of rope, A, Fig. 138. This fills up the grooves and makes the rope smooth and ready for serving or parcelling. Parcelling consists in winding the rope around and around its own circumference, B, Fig. 138. Although this may all be done by hand, yet it can be accomplished far better by using a "Serving Mallet," shown in D, Fig. 138. This instrument enables you to work tighter and more evenly than by hand, but in either case you must have the rope to be served stretched tightly between two uprights.

FIG. 138.—Worming, parcelling, and serving.

Often a rope is served without parcelling and for ordinary purposes parcelling is not required. A variation of serving is made by "half-hitch" work, as shown in Fig. 139. This is very pretty when well done and is very easy to accomplish.

FIG. 139.—Half-hitch work.

Take a half-hitch around the rope to be served, then another below it; draw snug; take another half-hitch and so on until the object is covered and the series of half-hitch knots forms a spiral twist, as shown in the illustrations. Bottles, jugs, ropes, stanchions, fenders, and numerous other articles may be covered with half-hitch work; and as you become more expert you will be able to use several lines of half-hitches at the same time.

FIG. 140.—Half-hitch work.

FIG. 141.—Four-strand braid (making).

Four-strand braiding is also highly ornamental and is easy and simple. The process is illustrated in Fig. 141, and consists in crossing the opposite strands across and past one another, as shown in A, B, C, Fig. 141.

FIG. 142.—Four-strand braid (complete).

Still more ornamental is the "Crown-braid" which appears, when finished, as in Fig. 143. The process of forming this braid is exactly like ordinary crowning and does not require any description; it may be done with any number of strands, but four or six are usually as many as the beginner cares to handle at one time.

FIG. 143.—Crown-braid.

FIG. 144.—Rope buckle.

When the rope-worker has mastered all the knots, ties, bends, hitches, and splices I have described, he will find a new field open to the use of rope in innumerable ways. Barrels, casks, bales, or other objects may be roped, or slung, with ease and security; ropes will be pressed into service for straps and belts; and buckles may be readily formed by the simple expedient shown in Fig. 144.

FIG. 145.—Swivels.

If a swivel is required it can be arranged as shown in Fig. 145, while several simple slings are illustrated in Figs. 146-148. In a factory, or machine shop, rope belting will often prove far better than leather, and if well spliced together will run very smoothly and evenly even on long stretches. As a recreation for killing time aboard ship, or on rainy vacation days, few occupations will prove more enjoyable than tying fancy knots and making new splices and bends or inventing new variations of the numerous hitches, ties, and knots you already know.

FIG. 146

FIG. 147

FIG. 148

FIGS. 146, 147, and 148.—Slings.

HALTERS FOR ANIMALS

FIG. 149—Put a Loop over the Horse's Nose

FIG. 150—The "Bowline" Knot

Every now and then a temporary halter is needed for a horse, and in Fig. 149 such a halter is shown. This halter is made by putting the end of a long rope around the neck of the horse and then tying a common bow-line knot. (See Fig. 150.)

FIG. 151—Follow this with a Second Loop

FIG. 152—Pass the Second Loop under the First

Fig. 151 shows the second step to be followed, that of passing the rope around the animal's head twice, while Fig. 152 shows how the second loop is passed under the first.

FIG. 153—The Second Loop should be Long

FIG. 154—It goes over the Forelock and Ears

In Fig. 153 the rope is shown sufficiently long enough to enable it to be passed over the ears of the animal and leave the halter completed, as shown in Fig. 154.

INDEX

Artificial eye

Baggage

Barrels

Beams

Belaying-pin

Belaying-pin splice

Belting

Bends

Bight

Billet

Blackwall hitch

Blocks

Bolt-rope

Bow-knots

Bow-line

Bow-line on bight

Bow shortening

Boxes

Bridles

Builders' hitch

Builders' knot

Bundles

Butchers' knots

Cable

Casks

Catspaws

Chain hitch

Chain knots

Chests

Cleat tie

Clinches

Close band

Clove hitch

Cordage

Core

Cotton

Cotton rope

Crown braid

Crowning

Crown knots

Cuckolds' necks

Cut splice

Deadeye lashing

Deadeyes

Dogshanks

Double chain

Double crown

Double figure-eight

Double knots

Double plait

Double wall

Double wall and crown

End

Ending

Ending rope

End pointing

Eyes

Eye splice

Fancy knots

Fibres

Fid

Figure-eight knot

Fisherman's hitch

Fisherman's knot

Fivefold knot

Flemish eye

Fourfold knot

Four-strand braid

Four-stranded rope

French shroud knot

Gaff-topsail halyard bend

Garrick bend

Gordian knot

Granny knot

Grass

Grommets

Gunners' knot

Gut lines

Half-hitch

Half-hitch and seizing

Half-hitch work

Handcuff kings

Handcuffs

Handles

Handspike

Hawser hitch

Hawsers

Hemp

Hemp rope

History of rope

Hitches

Hooks

Introduction

Jute

Lanyards

Larks' heads

Lashed cut splice

Lashings

Laying up

Leather braid

Left-handed rope

Long splice

Loop lashings

Loop knots

Loops

Magnus hitch

Manacles

Manila rope

Manrope knot

Marline

Marline spike

Marline-spike seamanship

Matthew Walker knot

Midshipman's hitch

Monkey chain

Mooring knots

Necklace tie

Nettles

Nooses

Open chain

Open-hand knot

Ordinary knot

Overhand knot

Packages

Parcelling

Parts of rope

Pier bend

Pointed rope

Pointing

Quoits

Reef knot

Reefing knots

Repairing rope

Rigging

Right-hand rope

Rings

Roband hitch

Rolling hitch

Rope

Rope buckles

Rose lashing

Round turn

Running bow-line

Running knot

Running noose

Sailors' knots

Seized shortening

Seizing

Selvagee

Selvagee board

Selvagee strap

Serving

Serving mallet

Sevagee

Sheaves

Sheepshanks

Shortenings

Short splice

Shroud knots

Silk

Simple hitch

Simple knots

Single plait

Sinkers

Sisal flax

Sixfold knot

Slings

Slip knots

Slippery hitch

Snaking

Spars

Spiles

Splices

Splicing

Square knots

Standing part

Stopper knot

Stoppers

Stops

Strands

Straps

Strength of rope

String

Studding-sail bend

Swivels

Tackle

Threefold knot

Throat seizing

Ties

Timber

Timber hitch

Toggles

Tomfool knot

Topsail-halyard toggle

Treble knot

Turks' caps

Turks' heads

Twine

Twist braid

Twist knot

Twist shortening

Twists

Wall and crown

Wall crowned

Wall knots

Warp

Waterman's knot

Weaver's knot

Wedding knot

Weight of rope

Wharf tie

Whipping

Wind knots

Wire rope

Worming

Yarn